





Verschraubung IG/IG 422 konisch dichtend
Verschraubung IG/IG 424 flach dichtend

EN 10241 beidseitig Innengewinde, Material AISI 316 Feinguss

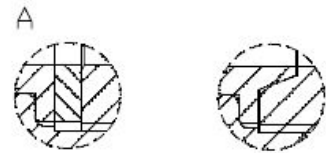

Flach dichtend Konisch dichtend

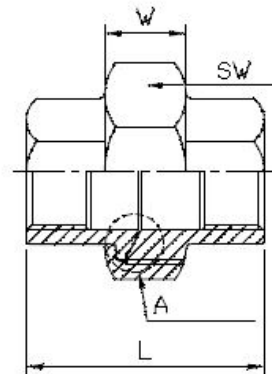

Abmessung Rp-DIN 2999	L mm	W mm	SW	Gew.kg/Stk
1/8"	30	12	27	0,08
1/4"	30	12	27	0,10
3/8"	33	13	31	0,14
1/2"	38	14	38	0,17
3/4"	40	14	45	0,28
1"	49	17	54	0,35
1 1/4"	50	17	64	0,56
1 1/2"	56	19	72	0,74
2"	62	21	86	1,01
2 1/2"	68	23	105	1,96
3"	77	26	122	2,40
4"	83	30	150	3,30

