


T-Einschraubverschraubungen DIN 3858

Whitworth-Rohrgewinde (kegelig)
 Form C, DIN 3852 Teil 2 bzw.
 Whitworth-Rohrgewinde DIN/ISO 228 (zylindr.)
 Dichtkante Form B, DIN 3852 Teil 2



Reihe	PN	Ra	NPT	i	S2	S1	L2	I2	I3	Gewicht %	Artikel
LL	100	4	R 1/8 keg.	8	10	9	21	11,0	17	2,6	TEV-04LLRK 1/8
		6	R 1/8 keg.	8	12	9	21	9,5	17	3,4	TEV-06LLRK 1/8
		8	R 1/8 keg.	8	14	12	23	11,5	20	3,7	TEV-08LLRK 1/8
L	250	6	R 1/8 keg.	8	14	12	27	12,0	20	5,1	TEV-06LRK 1/8
		8	R 1/4 keg.	12	17	12	29	14,0	26	6,9	TEV-08LRK 1/4
		10	R 1/4 keg.	12	19	14	30	15,0	27	9,2	TEV-10LRK 1/4
		12	R 3/8 keg.	12	22	17	32	17,0	28	12,1	TEV-12LRK 3/8
		15	R 1/2 keg.	14	27	19	36	21,0	34	19,8	TEV-15LRK 1/2
	160	18	R 1/2 keg.	14	32	24	40	23,5	36	29,1	TEV-18LRK 1/2
		22	G 3/4 A	16	36	27	44	27,5	42	36,9	TEV-22LR 3/4
		28	G 1 A	18	41	36	47	30,5	48	61,0	TEV-28LR 1
		35	G 1 1/4 A	20	50	41	56	34,5	54	84,9	TEV-35LR 1 1/4
S	630	42	G 1 1/2 A	22	60	50	63	40,0	61	142,4	TEV-42LR 1 1/2
		6	R 1/4 keg.	12	17	12	31	16,0	26	10,9	TEV-06SRK 1/4
		8	R 1/4 keg.	12	19	14	32	17,0	27	14,0	TEV-08SRK 1/4
		10	R 3/8 keg.	12	22	17	34	17,5	28	19,0	TEV-10SRK 3/8
		12	R 3/8 keg.	12	24	17	38	21,5	28	24,5	TEV-12SRK 3/8
		14	R 1/2 keg.	14	27	19	40	22,0	32	26,4	TEV-14SRK 1/2
		16	R 1/2 keg.	14	30	24	43	24,5	32	31,0	TEV-16SRK 1/2
	400	20	G 3/4 A	16	36	27	48	26,5	42	45,5	TEV-20SR 3/4
		25	G 1 A	18	46	36	54	30,0	48	87,5	TEV-25SR 1
		30	G 1 1/4 A	20	50	41	62	35,5	54	121,5	TEV-30SR 1 1/4
		38	G 1 1/2 A	22	60	50	72	41,0	61	174,0	TEV-38SR 1 1/2

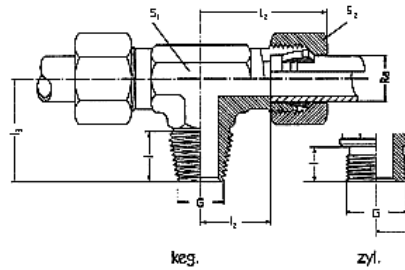