


### Einstellbare T- Schwenkverschraubungen

Mit Dichtkantenring DIN/ ISO 228 (2-teilig)



Reihe	PN	Ra	G	i	d3	h	S2	S1	S3	L3	L3	L2	L2	Gew. %	Artikel	
LR	250	6	G 1/8 A	8	14	2,5	14	17	17	24	10,5	27	12,0	8,1	TVH 6L-R1/8	
		8	G 1/4 A	12	18	3,0	17	22	19	30	14,0	29	14,5	14,2	TVH 8L-R1/4	
		10	G 1/4 A	12	18	3,0	19	22	19	30	14,0	30	15,5	15,2	TVH 10L-R1/4	
		12	G 3/8 A	12	22	3,0	22	27	24	36	16,5	33	18,0	24,3	TVH 12L-R3/8	
		15	G 1/2 A	14	26	4,5	27	32	30	45	21,5	37	21,5	41,5	TVH 15L-R1/2	
		160	18	G 1/2 A	14	26	4,5	32	32	30	45	21,5	37	21,0	46,4	TVH 18L-R1/2
		22	G 3/4 A	16	32	3,5	36	41	36	53	24,0	44	27,5	77,0	TVH 22L-R3/4	
		100	28	G 1 A	18	39	3,5	41	50	46	66	30,5	49	32,0	126,2	TVH 28L-R 1
		35	G 1 1/4 A	20	49	3,5	50	60	55	76	35,5	58	36,0	207,4	TVH 35L-R1 1/4	
		42	G 1 1/2 A	22	55	3,5	60	70	60	87	40,5	63	40,5	300,8	TVH 42L-R1 1/2	
SR	630	6	G 1/4 A	12	18	3,0	17	22	19	30	14,0	31	16,5	15,3	TVH 6S-R1/4	
		8	G 1/4 A	12	18	3,0	19	22	19	30	14,0	31	16,5	16,6	TVH 8S-R1/4	
		10	G 3/8 A	12	22	3,0	22	27	24	36	16,5	35	18,5	26,7	TVH 10S-R3/8	
		12	G 3/8 A	12	22	3,0	24	27	24	36	16,5	35	18,5	28,1	TVH 12S-R3/8	
		14	G 1/2 A	14	26	4,5	27	32	30	45	21,5	40	22,5	45,2	TVH 14S-R1/2	
		400	16	G 1/2 A	14	26	4,5	30	32	30	45	21,5	40	22,0	49,6	TVH 16S-R1/2
		20	G 3/4 A	16	32	3,5	36	41	36	53	24,0	48	26,5	85,2	TVH 20S-R3/4	
		25	G 1 A	18	39	3,5	46	50	46	66	30,5	56	31,5	155,9	TVH 25S-R 1	
		250	30	G 1 1/4 A	20	49	3,5	50	60	55	76	35,5	64	37,0	231,4	TVH 30S-R1 1/4
		38	G 1 1/2 A	22	55	3,5	60	70	60	87	40,5	72	41,5	339,0	TVH 38S-R1 1/2	

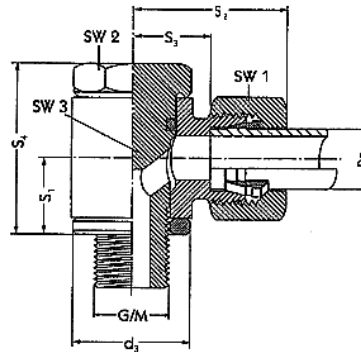