


Gerade-Einschraubverschraubungen DIN/ISO 228

Einschraubgewinde: DIN/ISO 228
Whitworth-Rohrgewinde (zylindr.)
Dichtkante Form B, DIN 3852 Teil2



Reihe	PN	Ra	G	i	S2	S1	L2	l2	D3	Gewicht %	Artikel
LL	100	4	G 1/8 A	8	14	10	19,5	17,5	14	1,5	GEV-04LLR 1/8
		6	G 1/8 A	8	14	12	19,5	16,0	14	1,9	GEV-06LLR 1/8
		8	G 1/8 A	8	14	14	22,5	17,0	14	2,0	GEV-08LLR 1/8
L	250	6	G 1/8 A	8	14	14	23,0	8,5	14	2,5	GEV-06LR 1/8
		6	G 1/4 A	12	14	19	25,0	10,0	18	4,0	GEV-06LR 1/4
		6	G 3/8 A	12	14	22	26,0	11,5	22	6,0	GEV-06LR 3/8
		6	G 1/2 A	14	14	27	27,0	12,0	26	8,5	GEV-06LR 1/2
		8	G 1/8 A	8	17	14	24,0	9,5	14	3,5	GEV-08LR 1/8
		8	G 1/4 A	12	17	19	25,0	10,0	18	4,4	GEV-08LR 1/4
		8	G 3/8 A	12	17	22	26,0	11,5	22	6,2	GEV-08LR 3/8
		8	G 1/2 A	14	17	27	27,0	12,0	26	9,0	GEV-08LR 1/2
		10	G 1/8 A	8	19	17	25,5	10,5	14	4,0	GEV-10LR 1/8
		10	G 1/4 A	12	19	19	26,0	11,0	18	4,8	GEV-10LR 1/4
		10	G 3/8 A	12	19	22	27,0	12,5	22	6,3	GEV-10LR 3/8
		10	G 1/2 A	14	19	27	28,0	13,0	26	10,0	GEV-10LR 1/2
		12	G 1/8 A	8	22	19	27,0	12,5	14	5,2	GEV-12LR 1/8
		12	G 1/4 A	12	22	19	27,0	12,0	18	6,0	GEV-12LR 1/4
		12	G 3/8 A	12	22	22	27,0	12,5	22	7,1	GEV-12LR 3/8
		12	G 1/2 A	14	22	27	28,0	13,0	26	10,0	GEV-12LR 1/2
		12	G 3/4 A	16	22	32	29,0	14,0	32	13,8	GEV-12LR 3/4
		15	G 1/4 A	8	27	24	28,0	13,0	18	9,8	GEV-15LR 1/4
		15	G 3/8 A	12	27	24	29,0	13,5	22	11,5	GEV-15LR 3/8
		15	G 1/2 A	14	27	27	29,0	14,0	26	11,8	GEV-15LR 1/2
		15	G 3/4 A	16	27	32	30,0	15,0	32	17,0	GEV-15LR 3/4
	160	18	G 3/8 A	12	32	27	29,5	14,0	22	13,5	GEV-18LR 3/8
		18	G 1/2 A	14	32	27	31,0	14,5	26	13,8	GEV-18LR 1/2
		18	G 3/4 A	16	32	32	30,0	14,5	32	18,5	GEV-18LR 3/4
		22	G 3/8	12	36	32	30,0	16,0	22	18,0	GEV-22LR 3/8
		22	G 1/2 A	14	36	32	33,0	16,5	26	19,0	GEV-22LR 1/2
		22	G 3/4 A	16	36	32	33,0	16,5	32	20,0	GEV-22LR 3/4
		22	G 1 A	18	36	41	34,0	17,5	39	29,0	GEV-22LR 1
	100	28	G 1/2 A	14	41	41	33,0	17,5	26	26,0	GEV-28LR 1/2
		28	G 3/4 A	16	41	41	34,0	17,5	32	27,0	GEV-28LR 3/4
		28	G 1 A	18	41	41	34,0	17,5	39	27,5	GEV-28LR 1
		28	G 1 1/4 A	20	41	50	39,0	17,5	49	31,8	GEV-28LR 1 1/4
		35	G 1/2 A	14	50	46	37,0	17,5	26	32,4	GEV-35LR 1/2
		35	G 3/4 A	16	50	46	38,0	17,5	32	38,5	GEV-35LR 3/4
		35	G 1 A	18	50	46	39,0	17,5	39	40,0	GEV-35LR 1
		35	G 1 1/4 A	20	50	50	39,0	17,5	49	45,0	GEV-35LR 1 1/4

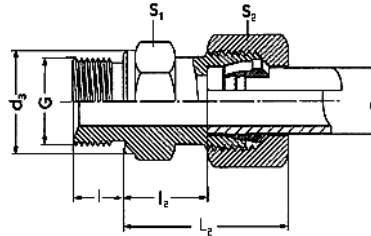

Reihe	PN	Ra	G	i	S2	S1	L2	I2	D3	Gewicht %	Artikel
		35	G 1 1/2 A	22	50	55	41,0	19,5	55	49,5	GEV-35LR 1 1/2
		42	G 1 A	18	60	55	42,0	19,0	39	52,4	GEV-42LR 1
		42	G 1 1/4 A	20	60	55	42,0	19,0	49	55,3	GEV-42LR 1 1/4
		42	G 1 1/2 A	22	60	55	42,0	19,0	55	61,5	GEV-42LR 1 1/2
LL	100	4	G 1/8 A	8	14	10	19,5	17,5	14	1,5	GEV-04LLR 1/8

Alle Verschraubungen sind auch weichdichtend nach DIN 3852-11 Form E lieferbar.
Bitte im Bestellfall die Bezeichnung "**WD**" anfügen (z.B. **GEV-12LR 1/4 WD**)

