


Gerade-Einschraubverschraubungen DIN/ISO 228

Einschraubgewinde: DIN/ISO 228  
Whitworth-Rohrgewinde (zylindr.)  
Dichtkante Form B, DIN 3852 Teil 2

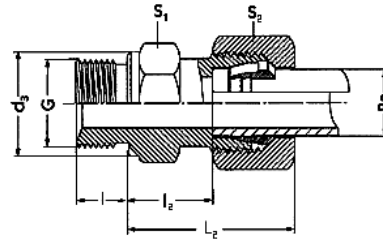

Reihe	PN	Ra	G	i	S2	S1	L2	I2	d3	Gewicht %	Artikel
S	630	6	G 1/4 A	12	17	19	28	13,0	18	5,4	GEV-06SR 1/4
		6	G 3/8 A	12	17	22	30	15,5	22	7,5	GEV-06SR 3/8
		6	G 1/2 A	14	17	27	33	18,0	26	12,5	GEV-06SR 1/2
		6	G 3/4 A	16	17	32	35	20,0	32	15,7	GEV-06SR 3/4
		8	G 1/4 A	12	19	19	30	15,0	18	6,3	GEV-08SR 1/4
		8	G 3/8 A	12	19	22	30	15,5	22	8,5	GEV-08SR 3/8
		8	G 1/2 A	14	19	27	33	18,0	26	12,0	GEV-08SR 1/2
		10	G 1/4 A	12	22	19	31	14,5	18	8,0	GEV-10SR 1/4
		10	G 3/8 A	12	22	22	31	15,0	22	8,9	GEV-10SR 3/8
		10	G 1/2 A	14	22	27	34	17,5	26	12,0	GEV-10SR 1/2
		12	G 1/4 A	12	24	22	33	16,5	18	9,5	GEV-12SR 1/4
		12	G 3/8 A	12	24	22	33	17,0	22	10,0	GEV-12SR 3/8
		12	G 1/2 A	14	24	27	34	17,5	26	14,0	GEV-12SR 1/2
		12	G 3/4 A	16	24	32	34	17,5	32	15,0	GEV-12SR 3/4
		14	G 1/4 A	12	27	24	34	16,0	18	12,2	GEV-14SR 1/4
		14	G 3/8 A	12	27	24	36	18,5	22	12,5	GEV-14SR 3/8
		14	G 1/2 A	14	27	27	37	19,0	26	15,5	GEV-14SR 1/2
		14	G 3/4 A	16	27	32	39	21,0	32	17,2	GEV-14SR 3/4
		14	G 1 A	18	27	41	41	23,0	39	20,4	GEV-14SR 1
	400	16	G 3/8 A	12	30	27	36	18,0	22	16,2	GEV-16SR 3/8
		16	G 1/2 A	14	30	27	37	18,5	26	16,5	GEV-16SR 1/2
		16	G 3/4 A	16	30	32	39	20,5	32	22,0	GEV-16SR 3/4
		16	G 1 A	18	30	41	41	22,8	39	34,8	GEV-16SR 1
		20	G 1/2 A	14	36	32	42	20,5	26	22,5	GEV-20SR 1/2
		20	G 3/4 A	16	36	32	42	20,5	32	26,5	GEV-20SR 3/4
		20	G 1 A	18	36	41	44	22,5	39	28,0	GEV-20SR 1
		20	G 1 1/4 A	20	36	50	44	22,5	49	30,4	GEV-20SR 1 1/4
		20	G 1 1/2 A	22	36	55	47	25,5	55	31,7	GEV-20SR 1 1/2
		25	G 1/2 A	14	46	41	47	23,0	26	45,8	GEV-25SR 1/2
		25	G 3/4 A	16	46	41	47	23,0	32	46,5	GEV-25SR 3/4
		25	G 1 A	18	46	41	47	23,0	39	49,5	GEV-25SR 1
		25	G 1 1/4 A	20	46	50	47	23,0	49	55,2	GEV-25SR 1 1/4
		25	G 1 1/2 A	22	46	55	50	26,0	55	58,0	GEV-25SR 1 1/2
	250	30	G 1 A	18	50	46	50	23,5	39	66,6	GEV-30SR 1
		30	G 1 1/4 A	20	50	50	50	23,5	49	68,0	GEV-30SR 1 1/4
		30	G 1 1/2 A	22	50	55	53	26,5	55	71,4	GEV-30SR 1 1/2
		38	G 1 1/4 A	20	60	55	57	26,0	49	90,2	GEV-38SR 1 1/4
		38	G 1 1/2 A	22	60	55	57	26,0	55	92,9	GEV-38SR 1 1/2

Alle Verschraubungen sind auch weichdichtend nach DIN 3852-11 Form E lieferbar.  
Bitte im Bestellfall die Bezeichnung "WD" anfügen (z. B. **GEV-12SR 1/2 WD**)

