


### Winkel-Einschraubverschraubungen DIN 158

Metrisches Gewinde (kegelig)  
 Form C, DIN 3852 Teil 1 bzw.  
 Metrisches Gewinde (zylindr.)  
 Dichtkante Form B, DIN 3852 Teil 2



Reihe	PN	Ra	G	i	S2	S1	L2	I2	I3	Gewicht %	Artikel	
LL	100	4	M 8x1 keg.	8	10	9	21	11,0	17	1,6	WEV-04LLMK 08x1,0	
		6	M 10x1 keg.	8	12	9	21	9,5	17	1,7	WEV-06LLMK 10x1,0	
		8	M 10x1 keg.	8	14	12	23	11,5	20	2,4	WEV-08LLMK 10x1,0	
L	250	6	M 10x1 keg.	8	14	12	27	12,0	20	3,2	WEV-06LMK 10x1,0	
		8	M 12x1,5 keg.	12	17	12	29	14,0	26	3,8	WEV-08LMK 12x1,5	
		10	M 14x1,5 keg.	12	19	14	30	15,0	27	5,8	WEV-10LMK 14x1,5	
		12	M 16x1,5 keg.	12	22	17	32	17,0	28	11,7	WEV-12LMK 16x1,5	
		15	M 18x1,5 keg.	12	27	19	36	21,0	32	12,6	WEV-15LMK 18x1,5	
		160	18	M 22x1,5 keg.	14	32	24	40	23,5	36	18,5	WEV-18LMK 22x1,5
			22	M 26x1,5	16	36	27	44	27,5	42	24,6	WEV-22LM 26x1,5
		100	28	M 33x2	18	41	36	47	30,5	48	37,4	WEV-28LM 33x2,0
			35	M 42x2	20	50	41	56	34,5	54	61,2	WEV-35LM 42x2,0
			42	M 48x2	22	60	50	63	40,0	61	84,6	WEV-42LM 48x2,0
S	630	6	M 12x1,5 keg.	12	17	12	31	16,0	26	6,5	WEV-06SMK 12x1,5	
		8	M 14x1,5 keg.	12	19	14	32	17,0	27	7,5	WEV-08SMK 14x1,5	
		10	M 16x1,5 keg.	12	22	17	34	17,5	28	12,0	WEV-10SMK 16x1,5	
		12	M 18x1,5 keg.	12	24	17	38	21,5	28	13,5	WEV-12SMK 18x1,5	
		14	M 20x1,5 keg.	14	27	19	40	22,0	32	15,3	WEV-14SMK 20x1,5	
		400	16	M 22x1,5 keg.	14	30	24	43	24,5	32	19,1	WEV-16SMK 22x1,5
			20	M 27x2	16	36	27	48	26,5	42	30,3	WEV-20SMK 27x2,0
			25	M 33x2	18	46	36	54	30,0	48	58,0	WEV-25SMK 33x2,0
		250	30	M 42x2	20	50	41	62	35,5	54	82,5	WEV-30SMK 42x2,0
			38	M 48x2	22	60	50	72	41,0	61	113,4	WEV-38SMK 48x2,0

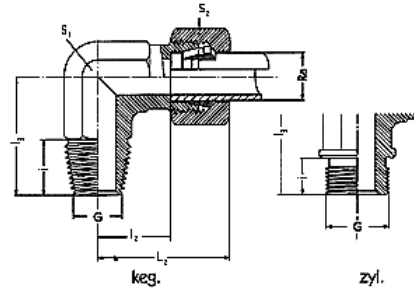